



PROFIRE MTH SERIES

TECHNICAL DATA INFORMATION PACKET



ProFire Burners

MTH Series

Technical Data Sheet

Uncontrolled to <9 PPM Low NOx Configuration

2.5 - 16.0 MM BTU/H

UL listed with choice of NFPA, CSD-1, GAP, and FM for U.S. or Canadian units

Standard equipment:	Combustion Control System options:	Fuel options:
3450 RPM motor, panel signal lights (Load Demand, Low Water, Flame Failure, Fuel Valve), combustion air proving switch, safety shutoff valves, 120/1/60 control circuit, burner mounted panel, and a shipped loose gas train (where applicable).	O ₂ Trim and Variable Frequency Drive (VFD)	Main Fuel: Natural or propane gas Igniter Fuel: Natural gas and/or propane.

Series Features

◊ *Optional Feature*



	MTH-25	MTH-35	MTH-42	MTH-52 to MTH-63	MTH-84 to MTH-105	MTH-126 to MTH-160
Flame Safeguard						
Open Damper Purge Control with UV Scanner	•	•	•	•	•	•
Mode of Operation						
Full Modulation Firing	•	•	•	•	•	•
Auto-Manual Firing Rate Control	•	•	•	•	•	•
Turndown						
Up to 5:1 on Natural Gas	•	•	•	•	•	•
Refractory						
Dry Oven & Gasket	◊ ¹	◊ ¹	◊ ¹	◊ ¹	◊ ¹	◊ ¹
Combustion Control System						
Parallel Positioning System	• ²	• ²	• ²	• ²	• ²	• ²
Ignition						
Gas/Electric Pilot and Ignition Transformer	•	•	•	•	•	•
Gas Components						
Butterfly Rate Control Valve	•	•	•	•	•	•
High & Low Gas Pressure Interlocks	◊	•	•	•	•	•
Gas Shutoff Cocks (2)	•	•	•	•	•	•
Motorized w/POC (1)	•	•	•			
Motorized Valve w/ POC & Solenoid Valve	◊	◊	◊	•	•	
Motorized Valve w/POC (2)	◊	◊	◊	◊	◊	◊
Dual Motorized w/POC (1)	◊	◊	◊	◊	◊	•
Normally Open Vent Valve	◊	◊	◊	◊	◊	•

¹ Refractory dry ovens are required for burner mounting, consult factory for options

² A Honeywell Controlinks parallel positioning system is standard, consult factory for alternative options

ProFire Burners

MTH Series

Standard Ratings Sheet

MTH: Gas Only Configuration


	Gas Input MBH	BHP @ 80% Eff.	Blower Motor HP	Furnace Pressure ("w.c.)	Standard Gas Train Pipe Size (in.)	Min. Gas Pressure (PSI)	
Model No. & Frame Size							
MTH-25-2	2,500	60	2	2	2.0	1.0	115 / 230 / 1
MTH-35-2	3,500	83	5	2	2.0	1.5	
MTH-42-3	4,200	100	5	4	2.0	1.5	208 / 230 / 460 / 3
MTH-52-3	5,200	125	7 1/2	4	2.0	2.0	
MTH-63-3	6,300	150	10	4	1.5	1.5	
MTH-84-4	8,400	200	10	6	1.5	1.5	460 / 3
MTH-105-4	10,500	250	15	6	1.5	2.0	
MTH-126-4	12,600	300	15	6	1.5	3.0	
MTH-147-4	14,700	350	20	6	1.5	3.0	
MTH-160-4	16,000	380	20	6	1.5	3.5	

Input is based on fuel BTU content, listed furnace pressure and altitude of 2,000 feet or less. If altitude > 2,000 feet and < 8,000 feet, derate capacity 4% per 1,000 feet over 2,000. Consult factory for higher altitudes. If furnace pressure exceeds listed value, derate capacity 5% for every 0.5" w.c. of pressure in excess of stated. Consult factory if derate exceeds 20%. Gas input is based on natural gas with 1,000 BTU/cu.ft., 0.60 gravity, 0" w.c. furnace pressure and the aforementioned conditions. For total pressure at manifold, add furnace pressure. Consult factory for 50 Hz. applications.

ProFire Burners

MTH Series

Standard Dimension Sheet

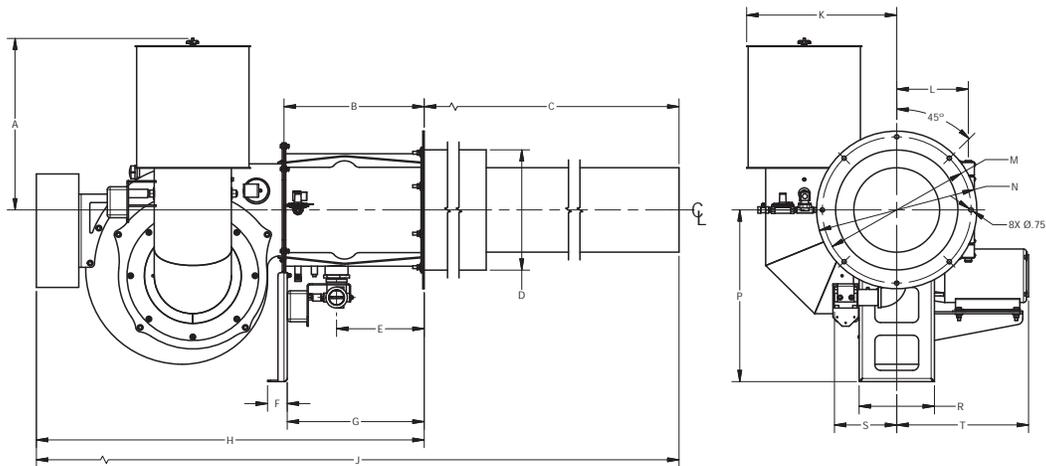

DIM	Burner Frame Size			
	Size 2	Size 3	Size 4	
Length in inches				
Overall burner length	J	88 3/4	106 3/4	137 3/4
Length of element	C	38 3/8	49 1/4	70
Mounting flange to panel box	H	50	57 1/2	67 3/4
Width in inches				
Center line to right side	T	17 1/8	17 3/4	23
Center line to left side	K	23 7/8	24 1/2	26 1/4
Height in inches				
Center line to top	A	31 1/4	29 3/4	44
Center line to bottom	P	23 1/2	27 1/4	30 1/2
Hinge pivot point in inches				
Mounting flange to hinge	B	18 1/2	21 1/2	24 1/2
Center line to hinge	L	8 5/8	9 1/4	12 1/2
Burner support in inches				
Length of support	F	9	14 3/4	3 3/8
Width of support	R	23 1/2	27 1/4	30 1/2
Mounting flange to support	G	29 1/4	34 3/4	23 7/8
Mounting flange dimensions in inches				
Outer diameter	N	20 1/2	23	28
Bolt circle diameter	M	18 1/2	21	26
Gas inlet dimensions in inches				
Center line to main gas inlet	L	8 5/8	9 1/4	12 1/2
Mounting flange to main gas inlet	E	9 1/4	12 1/4	15 1/4
Dry oven dimensions in inches				
Diameter of dry oven	D	12 5/8	16 1/8	21 3/8

Accompanying dimensions, while sufficiently accurate for layout purposes, must be confirmed for construction.



Packaged Burner Systems
 351 21st Street, Monroe, WI 53566 USA
 608.325.3141 · info@cleaverbrooks.com
 cleaverbrooks.com